


SUPPORTING
FLEXIBLE
BUSINESS

MODEL
M 300
+ Strapping Unit
(2S/4S/6S)

As central banks continue to devolve cash management responsibility to the commercial sector, there is an increasing demand to sort cash quickly and cost effectively.

Adopting a flexible business model allows you to allocate resources when and where it matters. Agility, flexibility and reliability together with minimal capital investment and maximum productivity are essential in achieving this model.

The **M 300 + Strapping Unit (2S/4S/6S)** is a solution ideally suited to, commercial banks, and cash centres where maximising operating efficiencies and maintaining the highest standards of accuracy and security are vital.

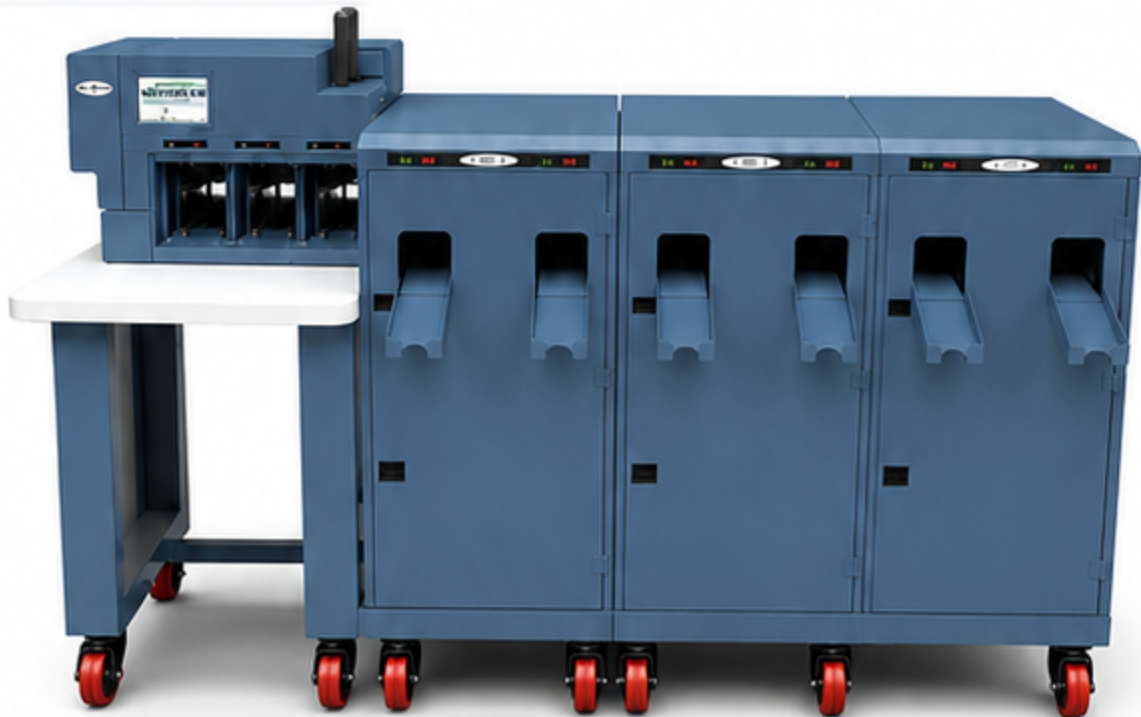

MAIN FUNCTIONS

CASH PROCESSING



- ATM Note
- Fit Note
- Unfit Note
- Suspect Note

AUTO STRAP



QR CODE PRINTING
(OPTIONAL)



AUTHENTICATION SENSORS

- MG

Full-width Multi-channel Magnetics
- UV

Double-sided UV
- IR

Infra-red Detection
- CIS

Contact Image Sensors (CIS)
- OCR

OCR (Optional)
For serial number reading

OPERATING MODES

- 

Count
- 

2-Way
Fitness Sort
- 

3-Way
Fitness Sort
- 

Denomination
Sort
- 

Face &
Orientation Sort
- 

Issue Split

OUTPUT OPTIONS

- ✓ Six pocket configurations from 2+1 to 8+1
- ✓ Output pockets with 500 banknotes capacity
- ✓ Option of 200 capacity pockets with the M 300

M 300 + STRAPPING UNIT (2S/4S/6S) SPECIFICATION

Size	1590mm X 620mm X 1083mm
Net Weight	111 Kg
Processing speed	1100 npm
Feeding/output capacity	Feeding capacity: Min 1000 notes, continuous feeding; output capacity: 500
Reject capacity	500 notes
Suitable note size	Length 92~180mm; Width 42~110mm
Strap SIZE	9 straps per minutes
Input Voltage	AC 220V (1±10%), 50 Hz (1±5%)
Overall power consumption	880W
Working environment	Temperature: 0~40°C, humidity: 10-80% (No condensate water)

IDEAL FOR



Banks



Cash in Transit
(CIT)



Currency
Exchanges



Retail Cash
Centers



Back Office
Operations